


Pre-rinse Sprays :: Aquajet Range



ALL AQUAJET PRE-RINSE SPRAYS

- Half turn levers come as standard
- Optional chunky cross head taps are reliable and easy to use. £2 supplement per pair.
- Restraining device (AJPR-RS) recommended to relieve stress on joints and to aid compliance with WRAS requirements
- All metal connections reduce cracking, thread stripping and leaks
- Spray guns, hoses and other parts are all fully interchangeable with most other manufacturers' components
- Extra long 300mm wall brace is standard. Can be shortened to achieve the perfect fit
- Optional heads and spray patterns
- Fan blade head recommended if water pressure is low
- All models WRC /WRAS approved
- **Minimum operating pressure 1.5bar**

Pre-rinse Spray :: Single pedestal, single feed

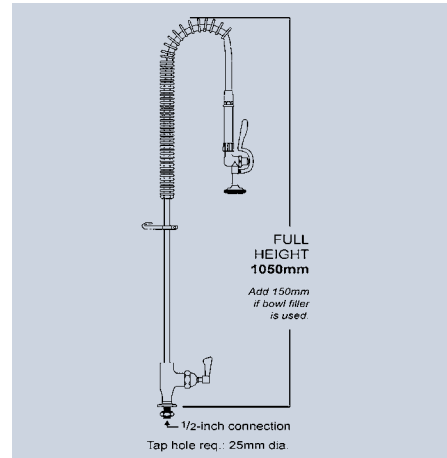


AJPR10 With cross head taps and optional bowl faucet BF1

AJPR-10 Pre-rinse spray, single pedestal, single feed, pre-built

AJPR-10CKD Pre-rinse spray, single pedestal, single feed, kit form

Pre-rinse Spray :: Wall mounted, single feed

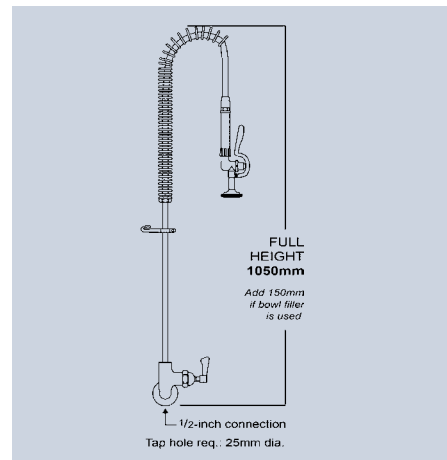

AJPR15 With cross head taps

AJPR-15 Pre-rinse spray, wall mounted, single feed, pre-built

AJPR-15CKD Pre-rinse spray, wall mounted, single feed, kit form

AJWALLFIT Required wall mounting kit

Minimum operating pressure: 1.5 bar

Aquajet
Pre-rinse Sprays
Are Available
In Two Formats

Fully Assembled

OR

The Economical Kit Form

FULLY ASSEMBLED

- Factory assembled
- Pressure and flow tested to 6 bar
- Guarantees performance - no leaks or missing parts
- Only takes minutes to make water connection
- So minimises installation time and cost
- No need to revisit the site for commissioning

UNASSEMBLED - KIT FORM

- Supplied as easy to assemble kit form
- The most economical model
- Identical parts to fully assembled version