


Feet & Castors

	Adjustable Foot Inserts To fit square tube	16-17
	End Caps & Threaded Inserts Square, rectangular & round	16-17
	Stainless Steel Levelling Feet Available with round, octagonal or flanged feet	17
	Castors :: Catering 2", 3", 4" & 5" standard & stainless steel	18-19


Adjustable Foot Inserts :: Zamak

- Height adjustable
- To fit 25, 30 or 40mm square tube
- Manufactured in the traditional zinc alloy, Zamak, for extra strength
- Less prone to the flange snapping and safer to knock in to tube


Product Code	Material	Tube size Square	Foot Type	Height (mm)	Total Adj. (mm)	For tube thicknesses (mm)	Vertical load (kg)	Box Qty
55 303 2500	Zamak	25	Flange	50-70	20	1.2	750	100
55 303 2501	Zamak, nickel plated	25	Flange	50-70	20	1.2	750	100
55 303 1000	Aluminium	30	Flange	64-99	35	1.2 or 1.5	1250	100
55 303 2000	Aluminium or Zamak	30	Hexagon	64-99	35	1.2 or 1.5	1250	100
55 303 4000	Zamak	40	Hexagon	78-110	32	1.2 or 1.5	1500	100
55 303 4001	Zamak, nickel plated	40	Hexagon	78-110	32	1.2 or 1.5	1500	100
55 303 4004	Zamak body, nickel plated, SS foot	40	Flange	78-110	30	1.2 or 1.5	900	100

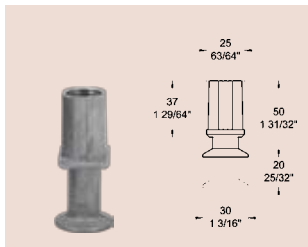


55 303 2500 25mm Insert
55 303 2501 25mm Insert, nickel plated

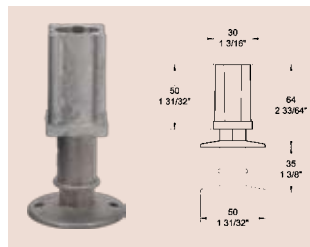


55 303 1000 30mm Insert, flange

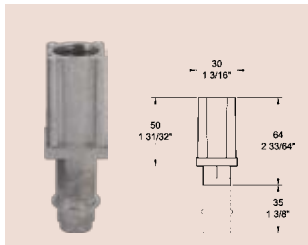

55 303 2000 30mm Insert, bullet/hex

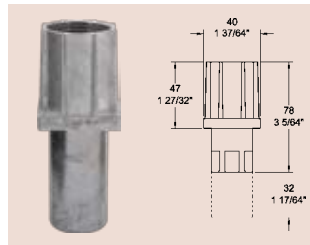


55 303 4000 40mm Insert, bullet/hex
55 303 4001 40mm Insert, bullet/hex, nickel plated

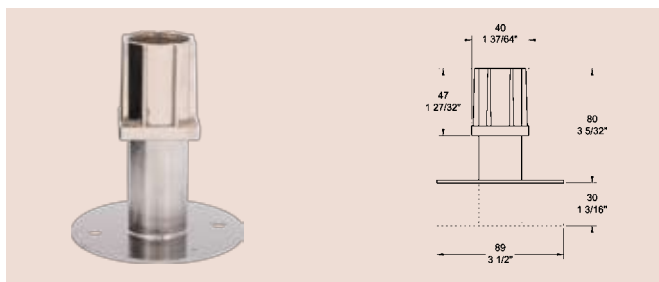


55 303 4004
40mm Insert, flange, nickel plated, stainless steel foot

Adjustable Foot Inserts :: Plastic

- Max Vertical Load: 100kg
- Material: Polypropylene
- Colour: Grey
- Max operating temperature: 40°C
- Fits 1.0mm or 1.2mm square tube thicknesses

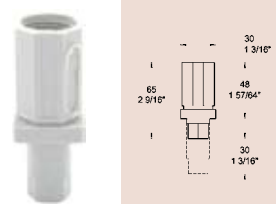

E.3030.PPG
30mm Insert, polypropylene

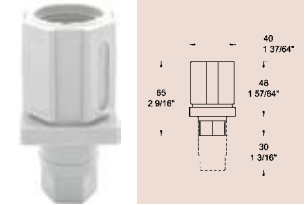

E.4040.PPG
40mm Insert, polypropylene

End Caps



- Black Plastic
- Square

P20SQ End cap, 20mm (25/32\"/>

P25SQ End cap, 25mm (63/64\"/>

P30SQ End cap, 30mm (1 3/16\"/>

P40SQ End cap, 40mm (1 3/8\"/>



- Black Plastic
- Rectangular

P4020REC End cap, 40 x 20mm (1 3/8\"/>

P5025REC End cap, 50 x 25mm (1 3/8\"/>

P5030REC End cap, 50 x 30mm (1 3/8\"/>



- Black Plastic
- Round

P13RD End cap, 13mm (33/64\"/>

P16RD End cap, 16mm (5/8\"/>

P20RD End cap, 20mm (25/32\"/>

P25RD End cap, 25mm (63/64\"/>

P30-32RD End cap, 30-32mm (1 3/16\"/>

P38RD End cap, 38mm (1 1/2\"/>



- Black Plastic, chrome plated
- Round
- Internal use only

P25RDCP End cap, plastic, chrome plated, 25mm (63/64\"/>

P32RDCP End cap, plastic, chrome plated, 32mm (1 1/8\"/>

P38RDCP End cap, plastic, chrome plated, 38mm (1 1/2\"/>

P50RDCP End cap, plastic, chrome plated, 50mm (1 3/8\"/>

Stainless Steel Levelling Feet :: Round Foot

- **Height:** State minimum and maximum required
- **Please note:** Minimum order is 200 Pieces

P50-10 Ø1½"	P50-11 Ø1½"	P50-12 Ø1½"	P50-13 Ø1½"
P51-10 Ø2"	P51-11 Ø2"	P51-12 Ø2"	P51-13 Ø2"
P50-14 Ø1½"	P50-15 Ø1½"	P50-16 Ø1½"	P50-17 Ø1½"
P51-14 Ø2"	P51-15 Ø2"	P51-16 Ø2"	P51-17 Ø2"

Stainless Steel Levelling Feet :: Octagonal Foot

- **Height:** State minimum and maximum required
- **Please note:** Minimum order is 200 Pieces

P52-10 Ø1½"	P52-11 Ø1½"	P52-12 Ø1½"	P52-13 Ø1½"
P53-10 Ø2"	P53-11 Ø2"	P53-12 Ø2"	P53-13 Ø2"
P52-14 Ø1½"	P52-15 Ø1½"	P52-16 Ø1½"	P52-17 Ø1½"
P53-14 Ø2"	P53-15 Ø2"	P53-16 Ø2"	P53-17 Ø2"

Stainless Steel Levelling Feet :: Flanged Foot

- **Height:** State minimum and maximum required
- **Please note:** Minimum order is 200 Pieces

P54-10 Ø1½"	P54-11 Ø1½"	P54-12 Ø1½"	P54-13 Ø1½"
P55-10 Ø2"	P55-11 Ø2"	P55-12 Ø2"	P55-13 Ø2"
P54-14 Ø1½"	P54-15 Ø1½"	P54-16 Ø1½"	P54-17 Ø1½"
P55-14 Ø2"	P55-15 Ø2"	P55-16 Ø2"	P55-17 Ø2"

Adjustable Feet :: Threaded Insert



- **Max Vertical Load:** 400kg
- **Thread Length:** 40mm (1 37/64")
- **Base Diameter:** 38mm (1 1/2")
- **Overall Height:** 55mm (2 11/64")

AFM8	Non-tilt, adjustable foot, M8 thread
AFM10	Non-tilt, adjustable foot, M10 thread



- **Max Vertical Load:** 100kg
- **Thread Length:** 25mm (63/64")
- **Base Diameter:** 40mm (1 37/64")

AFM8TG	Tilt Glide, adjustable foot, M8 thread
---------------	--

Kickplate Holder



- Suits 32mm (1 ¼") to 50mm (2") round tube

41 176 4460 Kick plate holder, zinc plated

Threaded Inserts



P25SQTI	Threaded insert, black, M8, 25 square
P30SQTI	Threaded insert, black, M8, 30 square
P40SQTI	Threaded insert, black, M10, 40 square

2" (50mm) Castors :: Standard Catering



Fig.	Castor Type	Wheel Diameter	Wheel Material	Tread Width	Effective Height	Swivel Radius	Plate Size	Hole Centres	Load Capacity	Product Code
2" (50mm) SQUARE PLATE UNBRAKED										
1	Swivel	50	Black Nylon	18	68	50	60x60	48/38x48/38	50	50NUBP
2" (50mm) SQUARE PLATE BRAKED										
2	Swivel	50	Black Nylon	18	68	80	60x60	48/38x48/38	50	50NBP

3" (75mm) Castors :: Standard Catering



Fig.	Castor Type	Wheel Diameter	Wheel Material	Tread Width	Effective Height	Swivel Radius	Plate Size	Hole Centres	Load Capacity	Product Code
3" (75mm) WITH EXPANDER FOR 25mm SQUARE TUBE UNBRAKED										
1	Swivel	75	Grey Rubber	23	95	47	-	-	70	75GRUBEX25
3" (75mm) WITH EXPANDER FOR 25mm SQUARE TUBE BRAKED										
2	Swivel	75	Grey Rubber	23	95	47	-	-	70	75GRBEX25
3" (75mm) WITH EXPANDER FOR 30mm SQUARE TUBE UNBRAKED										
3	Swivel	75	Black Nylon	23	95	47	-	-	70	75NUBEX
4	Swivel	75	Grey Rubber/Nylon	23	95	47	-	-	70	75GRUBEX
3" (75mm) WITH EXPANDER FOR 30mm SQUARE TUBE BRAKED										
5	Swivel	75	Black Nylon	23	95	65	-	-	70	75NBEX
6	Swivel	75	Grey Rubber/Nylon	23	95	65	-	-	70	75GRBEX
3" (75mm) WITH PLATE UNBRAKED										
7	Swivel	75	White Nylon	25	94	60	105x80	80/86x60	120	1352020
8	Swivel	75	Grey Rubber/Nylon	23	97	60	60x60	48/38x48/38	70	75GRUBP
3" (75mm) WITH PLATE BRAKED										
9	Swivel	75	White Nylon	25	94	60	105x80	80/86x60	120	1352760
10	Swivel	75	Grey Rubber/Nylon	23	97	60	60x60	48/38x48/38	70	75GRBPP

4" (100mm) Castors :: Standard Catering



Fig.	Castor Type	Wheel Diameter	Wheel Material	Tread Width	Effective Height	Swivel Radius	Plate Size	Hole Centres	Load Capacity	Product Code
4" (100mm) WITH EXPANDER FOR 30mm SQUARE TUBE UNBRAKED										
1	Swivel	100	White Nylon	32	128	82	-	-	150	100NUBEX
2	Swivel	100	Grey Rubber/Nylon	30	128	82	-	-	85	100GRUBEX
4" (100mm) WITH EXPANDER FOR 30mm SQUARE TUBE BRAKED										
3	Swivel	100	White Nylon	32	128	125	-	-	150	100NBEX
4	Swivel	100	Grey Rubber/Nylon	30	128	125	-	-	85	100GRBEX
4" (100mm) WITH EXPANDER FOR 30mm SQUARE TUBE UNBRAKED ADJUSTABLE										
5	Swivel	100	White Nylon	27	130	82	-	-	80	100NUBEXADJ
6	Swivel	100	Grey Rubber/Nylon	27	130	82	-	-	80	100GRUBEXADJ
4" (100mm) WITH EXPANDER FOR 30mm SQUARE TUBE BRAKED ADJUSTABLE										
7	Swivel	100	White Nylon	27	130	125	-	-	80	100NBEXADJ
8	Swivel	100	Grey Rubber/Nylon	27	130	125	-	-	80	100GRBEXADJ
4" (100mm) WITH SQUARE PLATE 57X57 UNBRAKED										
9	Swivel	100	White nylon	27	132	82	76x76	57x57	150	100NUBP57
10	Swivel	100	Grey Rubber/Nylon	27	132	82	76x76	57x57	80	100GRUBP57
4" (100mm) WITH SQUARE PLATE 57X57 BRAKED										
11	Swivel	100	White Nylon	27	132	86	76x76	57x57	150	100NBP57
12	Swivel	100	Grey Rubber/Nylon	27	132	86	76x76	57x57	80	100GRBP57
4" (100mm) WITH PLATE UNBRAKED										
13	Swivel	100	White Nylon	32	128	82	100x80	76/80x44.5/60	150	1321720
14	Swivel	100	Grey Rubber/Nylon	30	128	91	105x85	80/77x60	70	100GRUBP
4" (100mm) WITH PLATE BRAKED										
15	Swivel	100	White Nylon	32	128	82	100x80	76/80x44.5/60	150	1322720
16	Swivel	100	Grey Rubber/Nylon	30	128	125	105x85	80/77x60	70	100GRBPP
4" (100mm) WITH PLATE UNBRAKED FIXED										
17	Fixed	100	White Nylon	32	128	-	105x85	76/80x44.5/60	150	1321950
18	Fixed	100	Grey Rubber/Nylon	30	128	-	105x85	76/80x44.5/60	85	1321970
4" (100mm) WITH EXPANDER FOR 25mm SQUARE TUBE UNBRAKED										
19	Swivel	100	Grey Rubber/Nylon	27	130	82	-	-	80	100GRUBEX25SQ
4" (100mm) WITH EXPANDER FOR 25mm SQUARE TUBE BRAKED										
20	Swivel	100	Grey Rubber/Nylon	27	130	86	-	-	80	100GRBEX25SQ
4" (100mm) WITH EXPANDER FOR 25mm ROUND TUBE UNBRAKED										
21	Swivel	100	Grey Rubber/Nylon	27	130	82	-	-	80	100GRUBEX25RD
4" (100mm) WITH EXPANDER FOR 25mm ROUND TUBE BRAKED										
22	Swivel	100	Grey Rubber/Nylon	27	130	86	-	-	80	100GRBEX25RD

5" (125mm) Castors :: Standard Catering



Fig	Castor Type	Wheel Diameter	Wheel Material	Tread Width	Effective Height	Swivel Radius	Plate Size	Hole Centres	Load Capacity	Product Code
5" (125mm) WITH EXPANDER FOR 30mm SQUARE TUBE UNBRAKED										
1	Swivel	125	White Nylon	32	152	110	-	-	100	125NUBEX
2	Swivel	125	Grey Rubber/Nylon	30	152	110	-	-	100	125GRUBEX
5" (125mm) WITH EXPANDER FOR 30mm SQUARE TUBE BRAKED										
3	Swivel	125	White Nylon	32	152	110	-	-	100	125NBEX
4	Swivel	125	Grey Rubber/Nylon	30	152	110	-	-	100	125GRBEX
5" (125mm) WITH PLATE UNBRAKED										
5	Swivel	125	White Nylon	32	152	110	100x80	76/80x44.5/60	150	1321010
6	Swivel	125	Grey Rubber/Nylon	30	152	110	100x80	76/80x44.5/60	85	1321030
5" (125mm) WITH PLATE BRAKED										
7	Swivel	125	White Nylon	32	152	110	100x80	76/80x44.5/60	150	1322010
8	Swivel	125	Grey Rubber/Nylon	30	152	110	100x80	76/80x44.5/60	85	1322030
5" (125mm) WITH PLATE UNBRAKED FIXED										
9	Fixed	125	White Nylon	32	152	-	105x85	76/80x44.5/60	150	1321430
10	Fixed	125	Grey Rubber/Nylon	30	152	-	105x85	76/80x44.5/60	85	1321450
11	BUMPER, ROTATING FOR 30mm SQUARE TUBE									BUF 115530

Stainless Steel :: Stainless Steel

4" (100mm) Castors :: Stainless Steel Catering



Fig	Castor Type	Wheel Diameter	Wheel Material	Tread Width	Effective Height	Swivel Radius	Plate Size	Hole Centres	Load Capacity	Product Code
4" (100mm) WITH PLATE UNBRAKED										
1	Swivel	100	White Nylon	30	128	87	102x83	80x60	150	17130
2	Swivel	100	Grey Rubber/Nylon	30	128	87	102x83	80x60	85	15308G
4" (100mm) WITH PLATE BRAKED										
3	Swivel	100	White Nylon	30	128	87	102x83	80x60	150	17130FR
4	Swivel	100	Grey Rubber/Nylon	30	128	87	102x83	80x60	85	15308GFR

Stainless Steel :: Stainless Steel

5" (125mm) Castors :: Stainless Steel Catering



Fig	Castor Type	Wheel Diameter	Wheel Material	Tread Width	Effective Height	Swivel Radius	Plate Size	Hole Centres	Load Capacity	Product Code
5" (125mm) WITH PLATE UNBRAKED										
1	Swivel	125	White Nylon	30	154	102.5	102x83	80x60	150	17131
2	Swivel	125	Grey Rubber/Nylon	37.5	154	102.5	102x83	80x60	110	15312G
5" (125mm) WITH PLATE BRAKED										
3	Swivel	125	White Nylon	30	154	102.5	102x83	80x60	150	17131FR
4	Swivel	125	Grey Rubber/Nylon	37.5	154	102.5	102x83	80x60	110	15312GFR

